




## PAS68 STATIC BOLLARD - CR830SM

The CR830SM is the world's first impact tested bollard that can be bolted to any existing concrete foundation making it perfect for suspended slabs or other areas where you have existing concrete. The CR830SM will protect any key facility from a vehicular attack (refer to Technical Specifications).

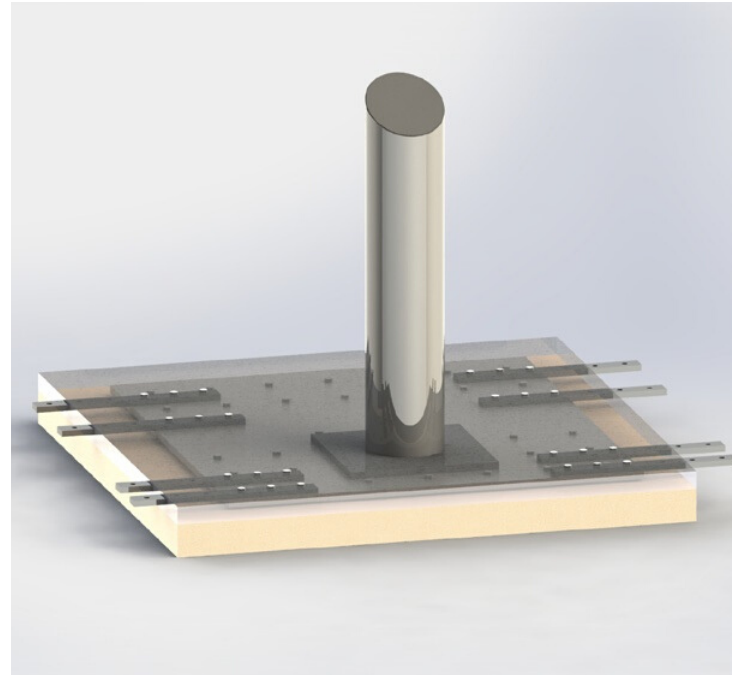


### Technical Specifications

- PAS68:V7500[N2]/48/90:5.5/0.0
- Bollard tested with N2 7,500kg vehicle at 48kph
- Diameter: 219mm
- Height: min 800mm above FFL
- Foundation: surface fixed to existing slab (>100mm), 70mm anchor depth
- Optional Finishes: hot dip galvanised (HDG); powder coated; wet painted; stainless steel
- Static fixed bollard
- Removable option requires additional depth for socket



## PAS68 STATIC BOLLARD - CR830SM

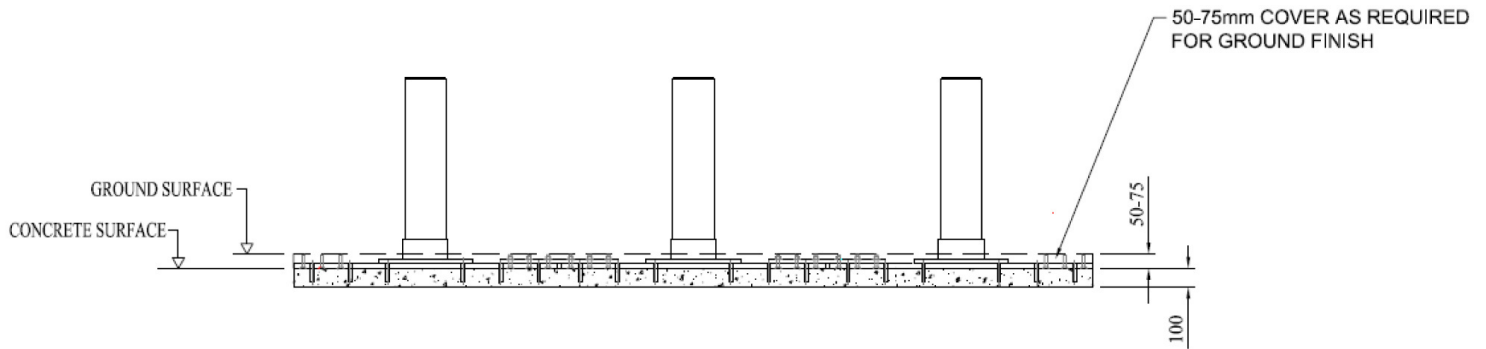

### Features

- 219mm diameter bollard core
- 1000mm finish height (bespoke heights available)
- Optional: stainless steel, decorative or bespoke sleeves available
- Requires as little as 50mm cover of any material
- Corner secitons available



Security Providers Licence:  
3251000

Electrical Contractor's Licence:  
86460



QBCC Licence:  
1133023



Master Builders Member:  
64928



ASIS Member:  
312860



ASIAL Member:  
37871



Perimeter Security Suppliers Association  
INSTALLER MEMBER

